

# **Smart Videohub 20x20**



Smart Videohub 20x20 is a larger advanced Ultra HD mixed format router with built in control panel and monitoring. Ideal for larger workgroups and mobile broadcasting, it includes advanced 6G-SDI connections so you can simultaneously connect and route any combination of SD, HD and Ultra HD video all on the same router at the same time. You also get revolutionary new visual routing with the unique spin knob control, push button panel and the built in LCD screen. Also includes Ethernet for remote control and a fully customizable software development kit for Mac and Windows.

£1,635

#### Connections

#### **SDI Video Inputs**

 $20 \times 10$  bit SD-SDI, HD-SDI and 6G-SDI.

## **SDI Video Outputs**

 $20 \times 10$  bit SD-SDI, HD-SDI and 6G-SDI.

#### **SDI Rates**

DVB-ASI, 270Mb, 1.5G, 3G, 6G.

### Video Input Re-Sync

None.

## **SDI Reclocking**

On all SDI outputs

## Reference Input

Tri-Sync or Black Burst.

#### **Control Panel Connection**

Ethernet.

## **Serial Control Connection**

RJ-7 RS-422.

#### Multi Rate Support

Auto detection of SD, HD or 6G-SDI. Simultaneous routing of 4K, HD, SD video and DVB-ASI.

#### Updates

USB.

#### **Router Control**


21 buttons for local control of Videohub. 6 buttons and scroll wheel for control of LCD display or RJ45 Ethernet.

## **Router Configuration**

Via front panel LCD or use either RJ45 Ethernet or USB 2.0 for setting IP address only.

#### **RS-422 Router Control**

1 x input for controlling router crosspoint switching.

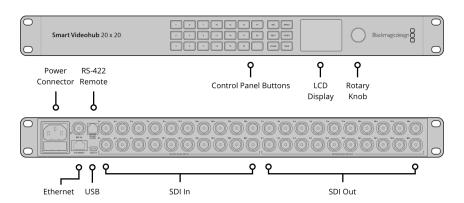

## Standards

#### **SD Video Standards**

525i59.94 NTSC, 625i50 PAL

#### **HD Video Standards**

720p50, 720p59.94, 720p60 1080p23.98, 1080p24, 1080p25, 1080p29.97, 1080p30, 1080p50, 1080p59.94, 1080p60 1080PsF23.98, 1080PsF24, 1080PsF25, 1080PsF29.97, 1080PsF30 1080i50, 1080i59.94, 1080i60

#### 2K Video Standards

2K DCI 23.98p, 2K DCI 24p, 2K DCI 25p, 2K DCI 23.98PsF, 2K DCI 24PsF, 2K DCI 25PsF

#### Ultra HD Video Standards

2160p23.98, 2160p24, 2160p25, 2160p29.97, 2160p30

#### 4K Video Standards

4K DCI 23.98p, 4K DCI 24p, 4K DCI 25p

#### **SDI Compliance**

SMPTE 259M, SMPTE 292M, SMPTE 296M, SMPTE 424M, SMPTE 425M Level A and B, ITU-R BT.656 and ITU-R BT.601.

#### **SDI Video Sampling**

4:2:2 and 4:4:4

#### **SDI Audio Sampling**

Television standard sample rate of 48kHz and 24 bit.

#### **SDI Color Precision**

4:2:2 and 4:4:4 10 bit.

## **SDI Color Space**

YUV or RGB.

## **SDI Auto Switching**

Automatically selects between SD-SDI, HD-SDI, 6G-SDI and DVB-ASI on each input so that each input can be running a different television standard.

#### **SDI Metadata Support**

Video payload identification ancillary data as per SMPTE 352M.

### Control

#### **Built in Control Panel**

20 buttons for local control of Videohub with 6 buttons and scroll wheel for menu control. 2.2 inch color display.

#### **External Control Panel**

Includes Blackmagic Videohub software control panel for Mac and Windows. Supports Blackmagic Smart Control and Blackmagic Master Control hardware panels. Includes Blackmagic Videohub SDK and Ethernet Videohub Control Protocol.

## Display

Built in LCD for video and menu settings.

# **Operating Systems**



Mac 10.14 Mojave, Mac 10.15 Catalina or later.



Windows 8.1 and 10.

## Software

## **Software Control**

Router control included free for Windows $^{\text{\tiny{TM}}}$  and  $\text{Mac}^{\text{\tiny{TM}}}$ .

## **Internal Software Upgrade**

Via included updater application.

## Power Requirements

## **Power Supply**

1 x Internal 90 - 240V AC. IEC power cable required.


## **Power Fail Protection**

Router connections preserved and restored instantly at power on.

## **Power Consumption**

34 Watts

# Physical Specifications

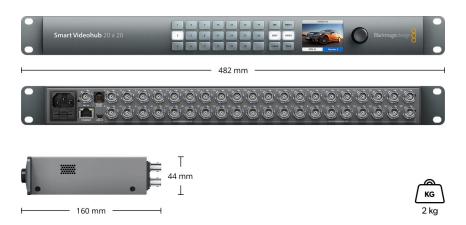

# Physical Installation

1 rack unit size. Less than 6 inches deep.

Environmental Specifications
Operating temperature:  0° to 40° C (32° to 104° F)  Storage temperature:  -20° to 45° C (-4° to 113° F)  Relative Humidity:  0% to 90% non-condensing
What's Included
Smart Videohub 20x20 SD card with software and manual
Warranty
3 Year Limited Manufacturer's Warranty, and 12 Month Warranty on the front panel.
All items on this website are copyright Blackmagic Design Pty. Ltd. 2020, all rights reserved.  All trademarks are property of their respective owners. MSRP excludes VAT and local shipping costs.  This website uses remarketing services to advertise on third party websites to previous visitors to our site.  You can opt out at any time by changing cookie settings. Privacy Policy
Blackmagic Design Authorized Reseller